

EVOLo-L

Evolo-L is an elegant, slim LED fixture featuring a row of mid-power LEDs, each with its own lens and louvre. This fixture is specifically designed for use in linear panel ceilings.

- Elegant, slim linear fixture for linear panel ceilings.
- Excellent low-glare task lighting according to EN-12.464/1 for office use
- Available in matte white or matte black textured coating



Downloads

[Photometrics Evolo](#)

Categories: [Baffle luminaires](#)



PRODUCT IMAGES

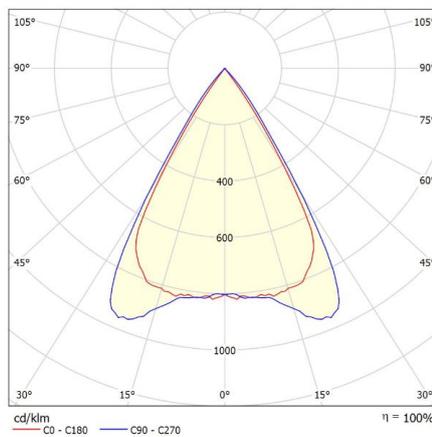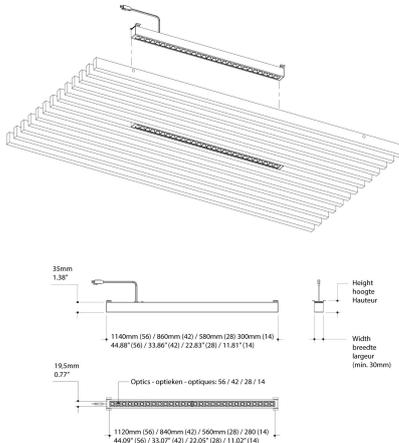

f-waardering volgens UGR

p Plafond	70	70	50	50	30	70	70	50	50	30	
p Muren	20	30	20	20	20	20	20	20	20	20	
p Vloer	20	20	20	20	20	20	20	20	20	20	
Ruimteafmeting	Perspectief dwars					Perspectief langs					
X	L.o.v. lampen					L.o.v. lampen					
Y											
2H	2H	15.5	16.1	15.7	16.3	16.5	17.1	17.8	17.4	18.0	18.2
	3H	15.4	15.9	15.6	16.2	16.4	17.0	17.6	17.3	17.8	18.0
	4H	15.3	15.8	15.6	16.1	16.3	16.9	17.5	17.2	17.7	18.0
	6H	15.2	15.7	15.5	16.0	16.2	16.9	17.4	17.2	17.6	17.9
	8H	15.2	15.6	15.5	15.9	16.2	16.8	17.3	17.2	17.6	17.9
	12H	15.1	15.6	15.5	15.9	16.2	16.8	17.2	17.1	17.5	17.8
4H	2H	15.3	15.8	15.6	16.1	16.3	16.9	17.5	17.2	17.7	18.0
	3H	15.1	15.6	15.5	15.9	16.2	16.8	17.2	17.1	17.5	17.8
	4H	15.1	15.4	15.4	15.8	16.1	16.7	17.1	17.1	17.4	17.8
	6H	15.0	15.3	15.4	15.7	16.0	16.6	17.0	17.0	17.3	17.7
	8H	14.9	15.2	15.4	15.6	16.0	16.6	16.9	17.0	17.3	17.7
	12H	14.9	15.1	15.3	15.5	16.0	16.6	16.8	17.0	17.2	17.6
8H	4H	14.9	15.2	15.4	15.6	16.0	16.6	16.9	17.0	17.3	17.7
	6H	14.9	15.1	15.3	15.5	15.9	16.5	16.7	17.0	17.1	17.6
	8H	14.8	15.0	15.3	15.4	15.9	16.5	16.6	16.9	17.1	17.5
	12H	14.8	14.9	15.2	15.4	15.9	16.4	16.5	16.9	17.0	17.5
12H	4H	14.9	15.1	15.3	15.5	16.0	16.6	16.8	17.0	17.2	17.6
	6H	14.8	15.0	15.3	15.4	15.9	16.5	16.6	16.9	17.1	17.5
	8H	14.8	14.9	15.2	15.4	15.9	16.4	16.5	16.9	17.0	17.5

Variatie op waarnemerspositie voor lampstanden 5

S = 1.0H	+5.7	-22.8	+5.2	-23.3
S = 1.5H	+8.3	-23.3	+7.9	-23.7
S = 2.0H	+10.3	-23.8	+9.8	-24.1
Standaardschotel	BK00		BK00	
Correctie-optictal	-3.2		-1.6	

Geoordeerde verblindingindicatie in relatie tot 2121lm Totale lichtstroom



Evolo-L is an elegant, slim LED fixture featuring a row of mid-power LEDs, each with its own lens and louvre. This fixture is specifically designed for use in linear panel ceilings.

- Elegant, slim linear fixture for linear panel ceilings.
- Excellent low-glare task lighting according to EN-12.464/1 for office use
- Available in matte white or matte black textured coating

Downloads

[Photometrics Evolo](#)

NOTES

ADDITIONAL INFORMATION

Light control	1-10V dimming, Casambi dimming, DALI dimming
Driver positie	Integrated, Loose driver
Producttoepassing	Education, Hospitality, Office, Public spaces
Shape	Rectangular
Photobiological safety	IEC 62471: RG1 (low risc)
Kleurconsistentie (SDCM)	SDCM=3
Optics	Lens en louver
Ambient temperature	-20°C / +40°C
Material	Steel
Kleurtemperatuur	Tunable White, 2700K
Emergency lighting	1 hour emergency power, Optional, Optional 1 hour autonomy self-test
Primaire aansluitingen	BST 14i2, Europlug, On request, GST18i3, GST18i5 pastelblauw, On the driver
Family	Evolu
Armaturefficiëntie	>130lm/W
Energielabel	A++
Voltage / frequency	220-240V, 50 / 60Hz
Powerfactor	>0.9
Bevestiging	Ceiling mounting
Isolatieklasse	Class II
Oriëntatie	Down

