



## LINTERNA-B

A linear luminaire with a parabolic batwing louver for use in climate and metal ceilings.

- Batwing louver design enables large fixture spacings while maintaining good uniformity
- Louvers matte or gloss anodized or UGR < 19 for office use
- Bandraster mounting allows for easy installation




### Downloads

[Photometrics Linterna](#)

Categories: [Strip grid fixtures](#)



PRODUCT IMAGES

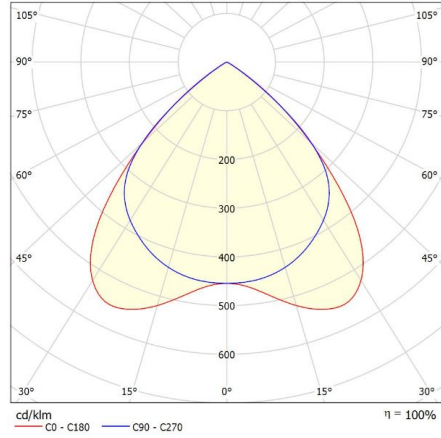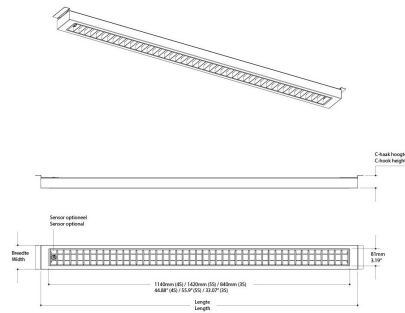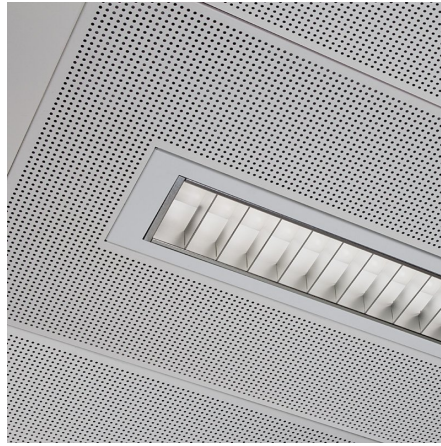

**f-waardering volgens UGR**

Plafond	70	70	50	50	30	70	70	50	50	30	
Muren	50	30	50	30	20	50	30	50	30	20	
Vloer	20	20	20	20	20	20	20	20	20	20	
Ruimteafmeting	Perspectief dwars					Perspectief langs					
X	t.o.v. lampen					t.o.v. lampen					
Y											
2H	2H	19.2	20.1	19.4	20.3	20.5	18.8	19.8	19.1	20.0	20.2
3H	3H	19.0	19.9	19.3	20.1	20.4	18.7	19.5	19.0	19.8	20.0
4H	4H	18.9	19.7	19.3	20.0	20.3	18.6	19.4	18.9	19.6	19.9
6H	6H	18.9	19.6	19.2	19.9	20.2	18.5	19.2	18.9	19.5	19.8
8H	8H	18.8	19.5	19.2	19.8	20.1	18.5	19.2	18.8	19.5	19.8
12H	12H	18.8	19.5	19.2	19.8	20.1	18.4	19.1	18.8	19.4	19.7
4H	2H	19.0	19.8	19.3	20.1	20.4	18.7	19.5	19.0	19.7	20.0
3H	3H	18.9	19.6	19.3	19.9	20.2	18.5	19.2	18.9	19.5	19.8
4H	4H	18.8	19.4	19.2	19.7	20.1	18.5	19.0	18.9	19.4	19.7
6H	6H	18.8	19.2	19.2	19.6	20.0	18.4	18.9	18.8	19.3	19.6
8H	8H	18.7	19.2	19.1	19.5	19.9	18.4	18.8	18.8	19.2	19.6
12H	12H	18.7	19.1	19.1	19.5	19.9	18.3	18.7	18.8	19.1	19.5
8H	4H	18.7	19.2	19.1	19.5	19.9	18.4	18.8	18.8	19.2	19.6
6H	6H	18.6	19.0	19.1	19.4	19.9	18.3	18.6	18.7	19.1	19.5
8H	8H	18.6	18.9	19.1	19.3	19.8	18.2	18.5	18.7	19.0	19.5
12H	12H	18.5	18.8	19.0	19.3	19.8	18.2	18.5	18.7	19.0	19.4
12H	4H	18.7	19.1	19.1	19.5	19.9	18.3	18.7	18.8	19.1	19.5
6H	6H	18.6	18.9	19.1	19.3	19.8	18.2	18.5	18.7	19.0	19.5
8H	8H	18.5	18.8	19.0	19.3	19.8	18.2	18.5	18.7	18.9	19.4

Variatie op waarnemingspositie voor langetandsten 5

S = 1.0H	+1.7 / -4.8	+2.3 / -5.6
S = 1.5H	+3.2 / -14.9	+3.5 / -16.3
S = 2.0H	+5.2 / -19.8	+5.3 / -21.0

Standaardstebel BK00

Correctie-stebel 0.6

Gecorrigeerde verbindingsindicatie in relatie tot 3718lm Totale lichtstroom





A linear luminaire with a parabolic batwing louver for use in climate and metal ceilings.

- Batwing louver design enables large fixture spacings while maintaining good uniformity
- Louvers matte or gloss anodized or UGR < 19 for office use
- Bandraster mounting allows for easy installation

## Downloads

[Photometrics Linterna](#)

## NOTES

---

---

---

---

---

---

---

## ADDITIONAL INFORMATION

<b>Driver positie</b>	Attached to the fixture, Loose driver
<b>Light control</b>	1-10V dimming, Casambi dimming, DALI dimming
<b>Material</b>	Steel
<b>Producttoepassing</b>	Education, Hospitality, Office, Public spaces
<b>Oriëntatie</b>	Down
<b>Shape</b>	Rectangular
<b>Isolatieklasse</b>	Class II
<b>Kleurtemperatuur</b>	Tunable White, 2700K
<b>Kleurconsistentie (SDCM)</b>	SDCM=3
<b>Ambient temperature</b>	-20°C / +40°C
<b>Primaire aansluitingen</b>	BST 14i2, Europlug, On request, GST18i3, GST18i5 pastelblauw, On the driver
<b>Bevestiging</b>	Recessed
<b>Photobiological safety</b>	IEC 62471: RG1 (low risc)
<b>Emergency lighting</b>	1 hour emergency power, Optional, Optional 1 hour autonomy self-test
<b>Family</b>	Linterna
<b>Energielabel</b>	A++
<b>Voltage / frequency</b>	220-240V, 50 / 60Hz
<b>Powerfactor</b>	>0.9

