



LINTERNA-K

Linterna-K is a linear LED fixture with a parabolic batwing louver for use in climate ceilings. The light distribution ensures optimal uniformity at large fixture spacings up to 3 meters.

- Batwing louver design enables large fixture spacings while maintaining good uniformity
- Louvers matte or gloss anodized or UGR < 19 for office use
- C-hook mounting enables easy installation




Downloads

[Photometrics Linterna](#)

Categories: [Climate ceiling fixtures](#)



PRODUCT IMAGES

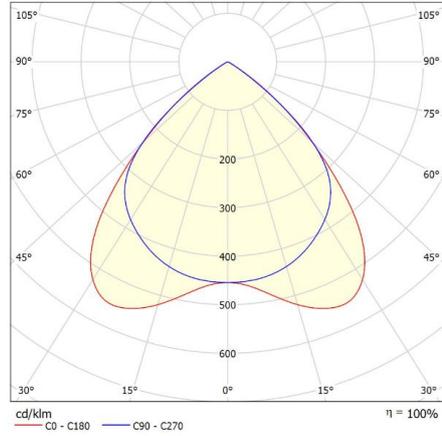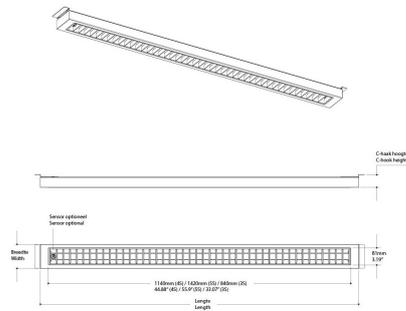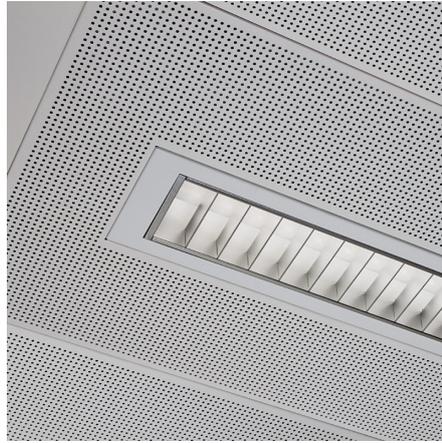

f-waardering volgens UGR

p Plafond	70	70	50	50	30	70	70	50	50	30	
p Muren	50	30	50	30	30	50	30	50	30	30	
p Vloer	20	20	20	20	20	20	20	20	20	20	
Ruimteafmeting	Perspectief dwars					Perspectief langs					
X	L.v.v. lampen					L.v.v. lampen					
Y											
2H	2H	19.2	20.1	19.4	20.3	20.5	18.8	19.8	19.1	20.0	20.2
3H	3H	19.0	19.9	19.3	20.1	20.4	18.7	19.5	19.0	19.8	20.0
4H	4H	18.9	19.7	19.3	20.0	20.3	18.6	19.4	18.9	19.6	19.9
6H	6H	18.9	19.6	19.2	19.9	20.2	18.5	19.2	18.9	19.5	19.8
8H	8H	18.8	19.5	19.2	19.8	20.1	18.5	19.2	18.8	19.5	19.8
12H	12H	18.8	19.5	19.2	19.8	20.1	18.4	19.1	18.8	19.4	19.7
4H	2H	19.0	19.8	19.3	20.1	20.4	18.7	19.5	19.0	19.7	20.0
3H	3H	18.9	19.6	19.3	19.9	20.2	18.5	19.2	18.9	19.5	19.8
4H	4H	18.8	19.4	19.2	19.7	20.1	18.5	19.0	18.9	19.4	19.7
6H	6H	18.8	19.2	19.2	19.6	20.0	18.4	18.9	18.8	19.3	19.6
8H	8H	18.7	19.2	19.1	19.5	19.9	18.4	18.8	18.8	19.2	19.6
12H	12H	18.7	19.1	19.1	19.5	19.9	18.3	18.7	18.8	19.1	19.5
8H	4H	18.7	19.2	19.1	19.5	19.9	18.4	18.8	18.8	19.2	19.6
6H	6H	18.6	19.0	19.1	19.4	19.9	18.3	18.6	18.7	19.1	19.5
8H	8H	18.6	18.9	19.1	19.3	19.8	18.2	18.5	18.7	19.0	19.5
12H	12H	18.5	18.8	19.0	19.3	19.8	18.2	18.5	18.7	18.9	19.4
12H	4H	18.7	19.1	19.1	19.5	19.9	18.3	18.7	18.8	19.1	19.5
6H	6H	18.6	18.9	19.1	19.3	19.8	18.2	18.5	18.7	19.0	19.5
8H	8H	18.5	18.8	19.0	19.3	19.8	18.2	18.5	18.7	18.9	19.4


Variatie op waarnemingspositie voor langetandsten 5

S = 1.0H	+1.7 / -4.8	+2.3 / -5.6
S = 1.5H	+3.2 / -14.9	+3.5 / -16.3
S = 2.0H	+5.2 / -19.8	+5.3 / -21.0

Standaardstebel BK00

Correctie-stebel 0.6

Gecorrigeerde verblindingindicatie in relatie tot 3718lm Totale lichtstroom

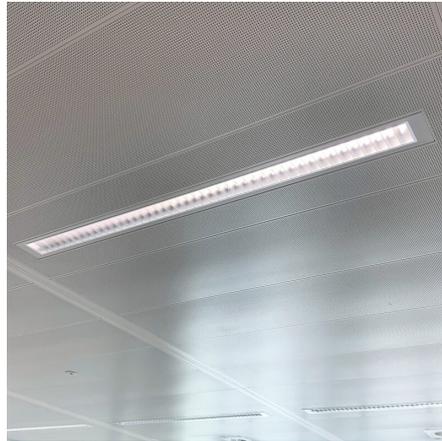



Linterna-K is a linear LED fixture with a parabolic batwing louver for use in climate ceilings. The light distribution ensures optimal uniformity at large fixture spacings up to 3 meters.

- Batwing louver design enables large fixture spacings while maintaining good uniformity
- Louvers matte or gloss anodized or $UGR < 19$ for office use
- C-hook mounting enables easy installation

Downloads

[Photometrics Linterna](#)

NOTES

ADDITIONAL INFORMATION

Family

Linterna

Producttoepassing

Hospitality, Office, Public spaces, Retail

