

## LINTERNA-S

Linterna-S is a linear pendant luminaire with a parabolic louver.

- The parabolic batwing louver design allows for large distances between luminaires, while maintaining good uniformity.
- Matte or glossy anodized louver UGR < 19 for use in offices
- Includes a 3-meter power cord and suspension cables




### Downloads

[Photometrics Linterna](#)

Categories: [Pendant luminaires](#)



## PRODUCT IMAGES

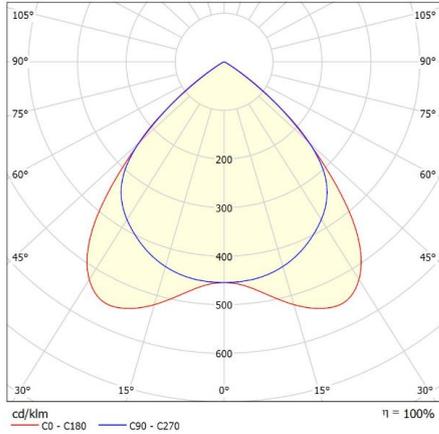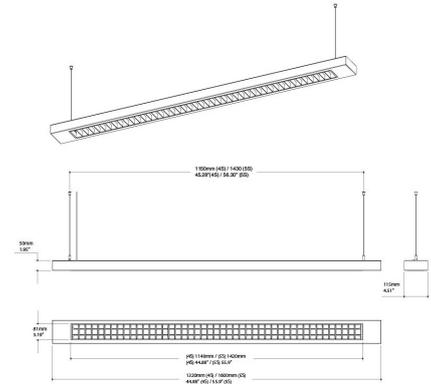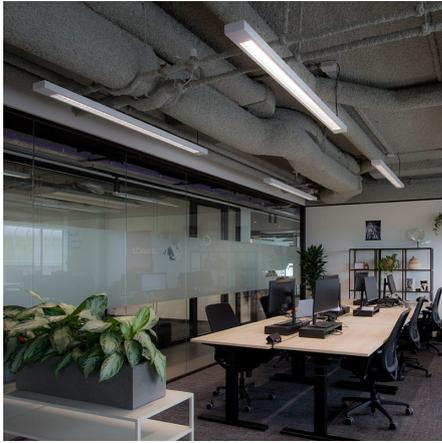

### f-waardering volgens UGR

p Plafond	70	70	50	50	30	70	70	50	50	30	
p Muren	50	30	50	30	30	50	30	50	30	30	
p Vloer	20	20	20	20	20	20	20	20	20	20	
Ruimteafmeting		Perspectief dwars					Perspectief langs				
X		E.o.v. lampen					E.o.v. lampen				
2H	2H	19.2	20.1	19.4	20.3	20.5	18.8	19.8	19.1	20.0	20.2
	3H	19.0	19.9	19.3	20.1	20.4	18.7	19.5	19.0	19.8	20.0
	4H	18.9	19.7	19.3	20.0	20.3	18.6	19.4	18.9	19.6	19.9
	6H	18.9	19.6	19.2	19.9	20.2	18.5	19.2	18.9	19.5	19.8
	8H	18.8	19.5	19.2	19.8	20.1	18.5	19.2	18.8	19.5	19.8
4H	12H	18.8	19.5	19.2	19.8	20.1	18.4	19.1	18.8	19.4	19.7
	2H	19.0	19.8	19.3	20.1	20.4	18.7	19.5	19.0	19.7	20.0
	3H	18.9	19.6	19.3	19.9	20.2	18.5	19.2	18.9	19.5	19.8
	4H	18.8	19.4	19.2	19.7	20.1	18.5	19.0	18.9	19.4	19.7
	6H	18.8	19.2	19.2	19.6	20.0	18.4	18.9	18.8	19.3	19.6
8H	12H	18.7	19.2	19.1	19.5	19.9	18.4	18.8	18.8	19.2	19.6
	2H	18.7	19.1	19.1	19.5	19.9	18.3	18.7	18.8	19.1	19.5
	4H	18.7	19.2	19.1	19.5	19.9	18.4	18.8	18.8	19.2	19.6
	6H	18.6	19.0	19.1	19.4	19.9	18.3	18.6	18.7	19.1	19.5
	8H	18.6	18.9	19.1	19.3	19.8	18.2	18.5	18.7	19.0	19.5
12H	2H	18.5	18.8	19.0	19.3	19.8	18.2	18.5	18.7	18.9	19.4
	4H	18.7	19.1	19.1	19.5	19.9	18.3	18.7	18.8	19.1	19.5
	6H	18.6	18.9	19.1	19.3	19.8	18.2	18.5	18.7	19.0	19.5
	8H	18.5	18.8	19.0	19.3	19.8	18.2	18.5	18.7	18.9	19.4
	12H	18.5	18.8	19.0	19.3	19.8	18.2	18.5	18.7	18.9	19.4
Variatie op waarnemingshoogte voor lampafstanden S											
S = 1.0H	+1.7 / -4.8					+2.3 / -5.6					
S = 1.5H	+3.2 / -14.9					+3.5 / -16.3					
S = 2.0H	+5.2 / -19.8					+5.3 / -21.0					
Standaardtabel	BK00					BK00					
Correctie-optelbaar	0.6					0.2					
Gecorrigeerde verblindingindicatie in relatie tot 3718lm Totale lichtstroom											

Linterna-S is a linear pendant luminaire with a parabolic louver.

- The parabolic batwing louver design allows for large distances between luminaires, while maintaining good uniformity.
- Matte or glossy anodized louver UGR< 19 for use in offices
- Includes a 3-meter power cord and suspension cables

## Downloads

[Photometrics Linterna](#)

## NOTES

---

---

---

---

---

---

---

## ADDITIONAL INFORMATION

<b>Driver positie</b>	Integrated
<b>Light control</b>	1-10V dimming, Casambi dimming, DALI dimming
<b>Material</b>	Steel
<b>Producttoepassing</b>	Education, Hospitality, Office, Public spaces
<b>Oriëntatie</b>	Down, Up+Down
<b>Shape</b>	Rectangular
<b>Isolatieklasse</b>	Class II, Class-I
<b>Photobiological safety</b>	IEC 62471: RG1 (low risc)
<b>Kleurtemperatuur</b>	Tunable White, 2700K
<b>Kleurconsistentie (SDCM)</b>	SDCM=3
<b>Ambient temperature</b>	-20°C / +40°C
<b>Primaire aansluitingen</b>	GST18i5 pastelblauw, Kabel, On the driver
<b>Productkleur</b>	On request
<b>Bevestiging</b>	Recessed
<b>Emergency lighting</b>	1 hour emergency power, Optional, Optional 1 hour autonomy self-test
<b>Family</b>	Linterna

