



## MESON ROUND 190-C

Meson round 190-C is a high-quality surface-mounted LED downlight featuring power LEDs covered by a prismatic lens or a double satin diffuser. The trim is recessed into the cover rim and combined with a matte or high-gloss glare-reducing reflector.

- Housing in matte white or matte black
- Reflector ring available in matte anodized, glossy anodized, matte black, or matte white
- Opal diffuser or prismatic lens
- Emergency lighting versions available



### **Downloads**

[Photometrics Meson round 190-C](#)

**Categories:** [Surface-mounted luminaires](#)



PRODUCT IMAGES

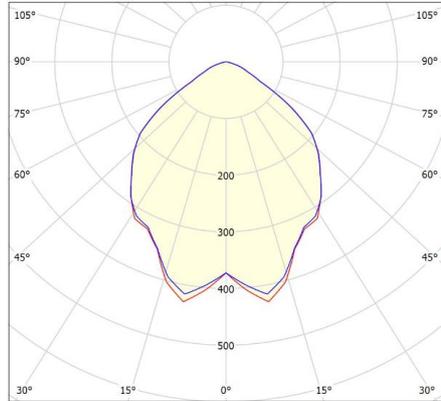

**f-waardering volgens UGR**

Diepte	70	70	50	50	30	70	70	50	50	30	
Muren	50	30	50	30	30	50	30	50	30	30	
Vloer	20	20	20	20	20	20	20	20	20	20	
Ruimteafmeting	Perspectief dwars					Perspectief langs					
X	L.o.v. lampen					L.o.v. lampen					
Y											
ZH	2H	18.9	20.0	19.1	20.2	20.4	18.9	20.0	19.1	20.2	20.4
	3H	18.9	20.0	19.3	20.2	20.5	18.9	19.9	19.2	20.2	20.4
	4H	18.9	19.9	19.2	20.1	20.4	18.9	19.8	19.2	20.1	20.4
	6H	18.9	19.7	19.2	20.0	20.3	18.8	19.7	19.2	20.0	20.3
	8H	18.8	19.6	19.2	20.0	20.3	18.8	19.6	19.2	19.9	20.2
	12H	18.8	19.6	19.2	19.9	20.2	18.8	19.6	19.1	19.9	20.2
4H	2H	18.9	19.9	19.2	20.1	20.4	18.9	19.8	19.2	20.1	20.4
	3H	19.1	19.8	19.4	20.2	20.5	19.0	19.8	19.4	20.1	20.5
	4H	19.1	19.7	19.5	20.1	20.4	19.0	19.7	19.4	20.1	20.4
	6H	19.0	19.6	19.4	20.0	20.4	19.0	19.6	19.4	20.0	20.3
	8H	19.0	19.5	19.4	19.9	20.3	19.0	19.5	19.4	19.9	20.3
	12H	18.9	19.4	19.4	19.8	20.3	18.9	19.4	19.4	19.8	20.2
8H	4H	19.0	19.5	19.4	19.9	20.3	19.0	19.5	19.4	19.9	20.3
	6H	18.9	19.4	19.4	19.8	20.2	18.9	19.4	19.4	19.8	20.2
	8H	18.9	19.3	19.4	19.7	20.2	18.9	19.3	19.4	19.7	20.2
	12H	18.9	19.2	19.3	19.7	20.2	18.8	19.2	19.3	19.6	20.1
12H	4H	19.0	19.4	19.4	19.8	20.3	18.9	19.4	19.4	19.8	20.3
	6H	18.9	19.3	19.4	19.7	20.2	18.9	19.3	19.4	19.7	20.2
	8H	18.9	19.2	19.3	19.7	20.2	18.8	19.2	19.3	19.6	20.1

Variatie op waardenresopitie voor lampstanden S

S = 1.0H	+0.6 / -1.2	+0.6 / -1.1
S = 1.5H	+1.7 / -4.2	+1.7 / -4.3
S = 2.0H	+3.2 / -5.7	+3.2 / -5.9

Standaardtabel BK01 BK01

Correctie-optelal 0.5 0.5

Gecorrigeerde verblindingindicatie in relatie tot 2041lm Totale lichtstroom





Meson round 190-C is a high-quality surface-mounted LED downlight featuring power LEDs covered by a prismatic lens or a double satin diffuser. The trim is recessed into the cover rim and combined with a matte or high-gloss glare-reducing reflector.

- Housing in matte white or matte black
- Reflector ring available in matte anodized, glossy anodized, matte black, or matte white
- Opal diffuser or prismatic lens
- Emergency lighting versions available

#### Downloads

[Photometrics Meson round 190-C](#)

## NOTES

---

---

---

---

---

---

---

## ADDITIONAL INFORMATION

<b>Isolatieklasse</b>	Class II
<b>Photobiological safety</b>	IEC 62471: RG1 (low risc)
<b>Kleurtemperatuur</b>	Tunable White, 2700K
<b>Ambient temperature</b>	-20°C / +40°C
<b>Light control</b>	1-10V dimming, Casambi dimming, DALI dimming
<b>Emergency lighting</b>	1 hour emergency power, Optional, Optional 1 hour autonomy self-test
<b>Productkleur</b>	On request
<b>Producttoepassing</b>	Education, Hospitality, Office, Public spaces
<b>Optics</b>	Microprismatic lens, Opalen diffusor
<b>Primaire aansluitingen</b>	On request, On the driver
<b>Family</b>	Meson
<b>Driver positie</b>	Integrated
<b>Material</b>	Acrylic, Steel
<b>Oriëntatie</b>	Down
<b>Bevestiging</b>	Ceiling mounting
<b>Shape</b>	Round

