



MESON SQUARE 180 CARDANIC SAPP

Meson square 180 cardanic SAPP is a series of LED recessed spotlights suitable for use in Interlu SAPP® ceilings. A cardanic mechanism allows easy adjustment of the spot up to 30° in all directions.

- Easy integration into Interlu SAPP® ceilings
- Can be combined with other square 180 SAPP® downlights
- Equipped with Jordan Alunova® reflector with spherical facets available in 24° or 40° beams

Downloads

[Photometrics Meson square 180 SAPP cardanic](#)






Create your own product, download the PDF specification sheet or add to the quotation:

Create your own product, download the PDF data sheet or add it to your quote:

Categories: [Climate ceiling fixtures](#), [Baffle luminaires](#)



PRODUCT IMAGES

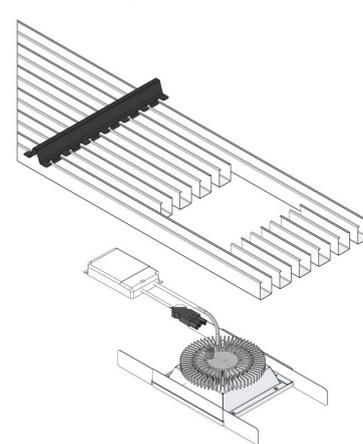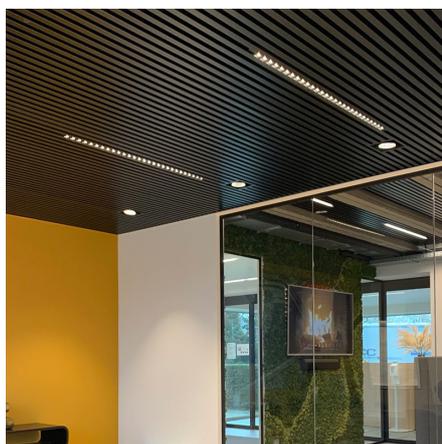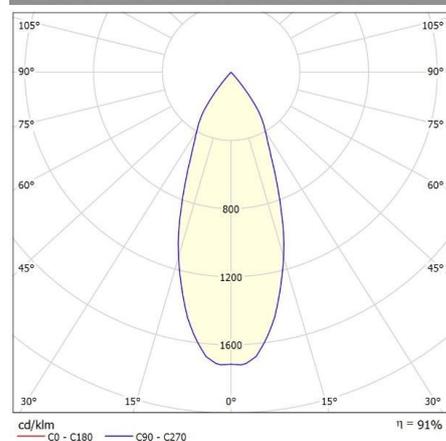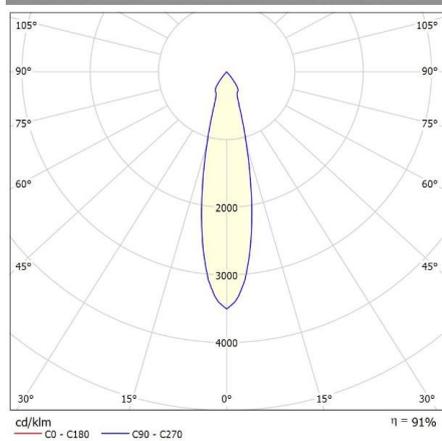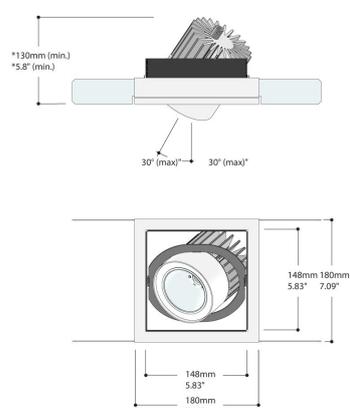

Meson square 180 cardanic SAPP is a series of LED recessed spotlights suitable for use in Interlu SAPP® ceilings. A cardanic mechanism allows easy adjustment of the spot up to 30° in all directions.

- Easy integration into Interlu SAPP® ceilings
- Can be combined with other square 180 SAPP® downlights
- Equipped with Jordan Alunova® reflector with spherical facets available in 24° or 40° beams

Downloads

[Photometrics Meson square 180 SAPP cardanic](#)

Create your own product, download the PDF specification sheet or add to the quotation:

Create your own product, download the PDF data sheet or add it to your quote:

NOTES

ADDITIONAL INFORMATION

Emergency lighting	1 hour emergency power, Optional, Optional 1 hour autonomy self-test
Driver positie	Loose driver
Shape	Round
Energielabel	A++
Kleurtemperatuur	Tunable White, 2700K
Kleurconsistentie (SDCM)	SDCM=2
Verwachte levensduur	L90B50@60,000h (Tq 25°C)
Material	Acrylic, Steel
Ambient temperature	-20°C / +40°C
Productkleur	On request
Color Rendering Index (CRI)	CRI97, CRI90, CRI80
Light control	1-10V dimming, Casambi dimming, DALI dimming
Primaire aansluitingen	BST 14i2, Europlug, On request, GST18i3, GST18i5 pastelblauw, On the driver
Producttoepassing	Education, Exhibition spaces, Hospitality, Office, Public spaces, Retail
Oriëntatie	Down
Family	Meson
Armaturefficiëntie	>125lm/W
Bevestiging	Recessed
Cut-out size	180x180mm
Isolatieklasse	Class II
Powerfactor	>0.9
Photobiological safety	IEC 62471: RG1 (low risc)

