



METRONOME-CG SQUARE

Metronome-CG square is an LED luminaire for suspended ceilings with concealed profiles, featuring 32 integrated lenses placed behind a grid-shaped louver. This innovative lighting fixture provides effective illumination and adds elegance to any architectural environment. Customers can choose from two different optics: the standard UGR< 19 or UGR< 16. The luminaires are made of powder-coated steel and are custom-made for each ceiling system.

- Architectural design with 32 optics
- Choice between UGR< 19 and UGR< 16 optics
- Louver finish white or high-gloss aluminum
- Flat design for shallow ceiling depths

Downloads



[Photometrics Metronome-CG square](#)

Create your own product, download the PDF specification sheet or add to the quotation:

Categories: [Concealed grid luminaires](#)



PRODUCT IMAGES

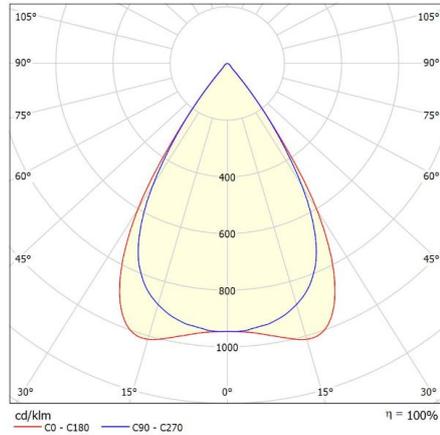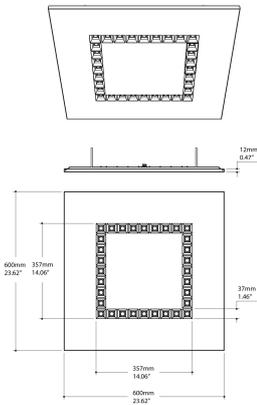

Glare Evaluation According to UGR													
		70	70	50	50	30	70	70	50	50	30	30	
p Ceiling		50	30	50	30	30	50	30	50	30	30	30	
p Walls		20	20	20	20	20	20	20	20	20	20	20	
p Floor		20	20	20	20	20	20	20	20	20	20	20	
Room Size	Viewing direction at right angles to lamp axis						Viewing direction parallel to lamp axis						
	X	Y											
2H	2H	15.6	15.4	15.9	16.6	16.8	15.4	16.2	15.7	16.4	16.6		
	3H	15.6	16.3	15.9	16.5	16.8	15.4	16.1	15.7	16.3	16.5		
	4H	15.6	16.2	15.9	16.5	16.7	15.3	16.0	15.6	16.2	16.5		
	6H	15.5	16.1	15.8	16.4	16.7	15.3	15.9	15.6	16.2	16.4		
	8H	15.5	16.0	15.8	16.3	16.6	15.2	15.8	15.6	16.1	16.4		
4H	2H	15.4	16.0	15.8	16.3	16.6	15.2	15.8	15.6	16.1	16.4		
	3H	15.5	16.1	15.8	16.4	16.7	15.3	15.9	15.6	16.2	16.4		
	4H	15.5	15.9	15.8	16.3	16.6	15.2	15.7	15.6	16.0	16.4		
	6H	15.4	15.8	15.8	16.2	16.6	15.2	15.6	15.6	15.9	16.3		
	8H	15.4	15.7	15.8	16.1	16.5	15.2	15.5	15.6	15.9	16.3		
8H	2H	15.3	15.7	15.8	16.1	16.5	15.1	15.4	15.6	15.9	16.3		
	3H	15.3	15.6	15.8	16.0	16.5	15.1	15.4	15.5	15.8	16.2		
	4H	15.3	15.5	15.8	16.0	16.4	15.1	15.3	15.5	15.7	16.2		
	6H	15.3	15.4	15.7	15.9	16.4	15.0	15.2	15.5	15.7	16.2		
	8H	15.3	15.4	15.7	15.9	16.4	15.1	15.3	15.5	15.7	16.2		
12H	2H	15.3	15.6	15.8	16.0	16.5	15.1	15.4	15.5	15.8	16.2		
	3H	15.3	15.5	15.8	16.0	16.4	15.1	15.3	15.5	15.7	16.2		
	4H	15.3	15.5	15.7	16.0	16.4	15.1	15.3	15.5	15.7	16.2		
	6H	15.3	15.5	15.7	16.0	16.4	15.1	15.3	15.5	15.7	16.2		
	8H	15.3	15.4	15.7	15.9	16.4	15.0	15.2	15.5	15.7	16.2		
Validation of the observer position for the luminaire distances S													
S = 1.0H		+3.5 / -6.8					+3.9 / -6.8						
S = 1.5H		+5.5 / -7.2					+6.0 / -7.2						
S = 2.0H		+7.5 / -7.7					+7.9 / -7.7						
Standard table		BK00					BK00						
Correction Summand		-2.9					-3.1						
Corrected Glare indices referring to 3862lm Total Luminous Flux													

Metronome-CG square is an LED luminaire for suspended ceilings with concealed profiles, featuring 32 integrated lenses placed behind a grid-shaped louvre. This innovative lighting fixture provides effective illumination and adds elegance to any architectural environment. Customers can choose from two different optics: the standard UGR < 19 or UGR < 16. The luminaires are made of powder-coated steel and are custom-made for each ceiling system.

- Architectural design with 32 optics
- Choice between UGR < 19 and UGR < 16 optics
- Louver finish white or high-gloss aluminum
- Flat design for shallow ceiling depths

Downloads

[Photometrics Metronome-CG square](#)

Create your own product, download the PDF specification sheet or add to the quotation:

NOTES

ADDITIONAL INFORMATION

Driver positie	Attached to the fixture, Loose driver
Shape	Square
Energielabel	A++
Light control	1-10V dimming, Casambi dimming, DALI dimming
Primaire aansluitingen	BST 14i2, Europlug, On request, GST18i3, GST18i5 pastelblauw, On the driver
Voltage / frequency	220-240V, 50 / 60Hz
Material	Steel
Powerfactor	>0.9
Kleurtemperatuur	Tunable White, 2700K
Emergency lighting	1 hour emergency power, Optional, Optional 1 hour autonomy self-test
Producttoepassing	Education, Hospitality, Office, Public spaces
Air extraction	Optional
Bevestiging	Recessed
Optics	Lens en louver
Packaging dimensions	Bulk packaging
CIE Flux code	96 99 100 100 100
Isolatieklasse	Class II
Ambient temperature	-20°C / +40°C
Kleurconsistentie (SDCM)	SDCM=3
Oriëntatie	Down
IP-class	IP20 (upwards)/IP40 (downwards)
Photobiological safety	IEC 62471: RG1 (low risc)
C-Haak hoogte	N/A
Family	Metronome

