



MOONGLOW ROUND 290

Moonglow round 290 is a surface-mounted fixture with a decorative luminous disc-shaped acrylic diffuser.

- Effective lighting with decorative architectural appeal
- Wall or ceiling mount
- Matte black or matte white finish
- IK6 impact resistant for use in corridors and stairwells
- Emergency lighting version available




Downloads

[Photometrics Moonglow round 290 BIM files](#) [Photometrics Moonglow round 290](#)

Categories: [Surface-mounted luminaires](#)



PRODUCT IMAGES

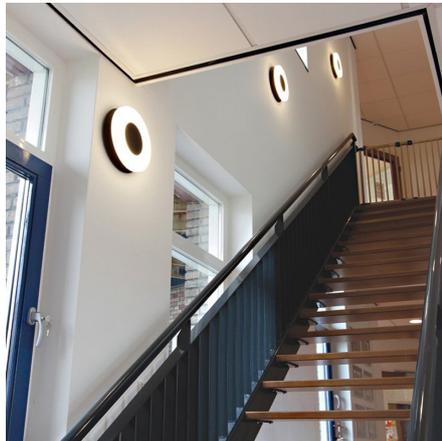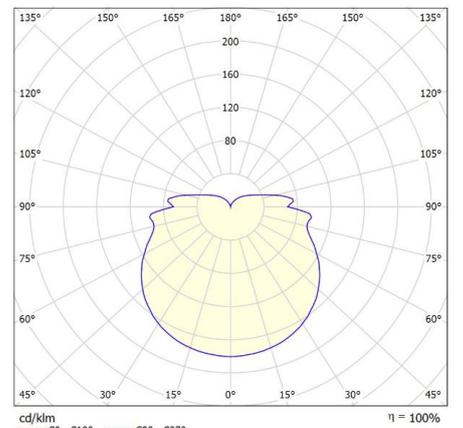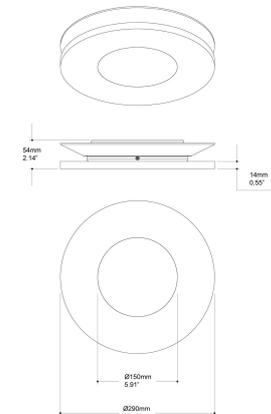



Moonglow round 290 is a surface-mounted fixture with a decorative luminous disc-shaped acrylic diffuser.

- Effective lighting with decorative architectural appeal
- Wall or ceiling mount
- Matte black or matte white finish
- IK6 impact resistant for use in corridors and stairwells
- Emergency lighting version available

Downloads

[Photometrics Moonglow round 290 BIM files](#) [Photometrics Moonglow round 290](#)

NOTES

ADDITIONAL INFORMATION

Shape	Round
Material	Acrylic
IP-class	IP20 (upwards)/IP40 (downwards)
Light control	1-10V dimming, Casambi dimming, DALI dimming
Emergency lighting	1 hour emergency power, Optional, Optional 1 hour autonomy self-test
Primaire aansluitingen	On request, On the driver
Packaging dimensions	Bulk packaging
Air extraction	N/A
Family	Moonglow
Oriëntatie	Adjustable, Down, Up+Down
Armaturefficiëntie	>80lm/W
Kleurconsistentie (SDCM)	SDCM=2
Voltage / frequency	220-240V, 50 / 60Hz
Producttoepassing	Education, Exhibition spaces, Hospitality, Office, Public spaces, Retail
Isolatieklasse	Class II
Powerfactor	>0.9
Ambient temperature	-20°C / +40°C
Optics	Opalen diffusor
Glare (UGR)	Not applicable
Bevestiging	Ceiling mounting, Wall mounting
Breedte	50mm
Driver positie	Integrated
Energielabel	A
Photobiological safety	IEC 62471: RG1 (low risc)

PHOTOMETRIC DATA

Moonglow Round 290 11W 1000lm 3000K CRI80 G8
Moonglow Round 290 11W 1050lm 4000K CRI80 G8
Moonglow Round 290 15W 1300lm 3000K CRI80 G8
Moonglow Round 290 15W 1400lm 4000K CRI80 G8
Moonglow Round 290 20W 1650lm 3000K CRI80 G8
Moonglow Round 290 20W 1700lm 4000K CRI80 G8
Moonglow Round 290 HO 24W 1950lm 3000K CRI80 G8
Moonglow Round 290 HO 24W 2000lm 4000K CRI80 G8
Moonglow Round 290 HO 33W 2500lm 3000K CRI80 G8
Moonglow Round 290 HO 33W 2600lm 4000K CRI80 G8

Downloads

[Photometrics Moonglow round 290 BIM files](#) [Photometrics Moonglow round 290](#)

DOWNLOADS

Downloads

[Photometrics Moonglow round 290 BIM files](#) [Photometrics Moonglow round 290](#)