



SIRIO EASY-KLIMAPLUS®

Sirio Easy-KlimaPlus, a 21.5 mm slim linear lighting fixture with lenses for use in Interalu Sirio Easy-KlimaPlus® ceilings.

- Fully integrated into [Interalu](#) Easy Klima Plus® ceilings
- Easy installation with magnetic mounting
- Available in three lengths 900, 1200 and 1500
- Unique lens configuration UGR < 19 office-compatible



Downloads

[Photometrics Sirio EKP](#)

Categories: [Climate ceiling fixtures](#)



PRODUCT IMAGES

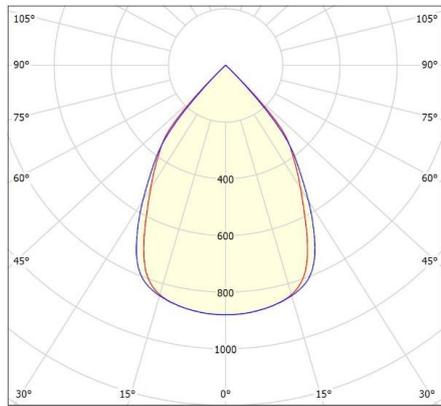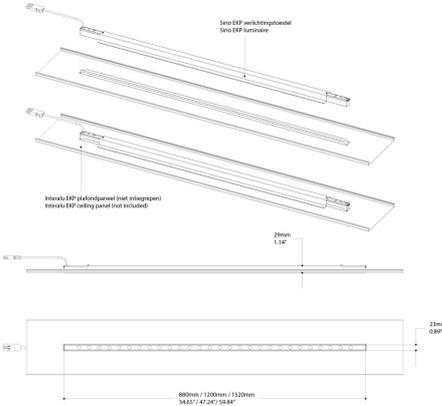

f-waardering volgens UGR

Ruimteafmeting	X	Y	Perspectief dwars					Perspectief langs				
			L.d.v. lampen					L.d.v. lampen				
			70	70	50	50	30	70	70	50	50	30
p Plafond			50	30	50	30	30	50	30	50	30	30
p Muren			20	20	20	20	20	20	20	20	20	20
p Vloer			20	20	20	20	20	20	20	20	20	20
2H	2H	18.0	19.7	19.2	19.0	20.0	18.7	19.4	18.9	19.6	19.8	
	3H	18.8	19.5	19.1	19.7	19.9	18.6	19.2	18.8	19.4	19.7	
	4H	18.7	19.3	19.0	19.6	19.9	18.5	19.1	18.8	19.4	19.6	
	6H	18.7	19.2	19.0	19.5	19.8	18.4	19.0	18.7	19.3	19.5	
	8H	18.6	19.2	19.0	19.5	19.8	18.4	18.9	18.7	19.2	19.5	
	12H	18.6	19.1	19.0	19.4	19.7	18.4	18.9	18.7	19.2	19.5	
4H	2H	18.7	19.3	19.0	19.6	19.9	18.5	19.1	18.8	19.3	19.6	
	3H	18.6	19.1	18.9	19.4	19.7	18.3	18.9	18.7	19.2	19.5	
	4H	18.5	19.0	18.9	19.3	19.6	18.3	18.7	18.7	19.0	19.4	
	6H	18.5	18.8	18.9	19.2	19.6	18.2	18.6	18.6	18.9	19.3	
	8H	18.4	18.8	18.8	19.1	19.5	18.2	18.5	18.6	18.9	19.3	
	12H	18.4	18.7	18.8	19.1	19.5	18.1	18.4	18.6	18.9	19.2	
8H	4H	18.4	18.7	18.8	19.1	19.5	18.2	18.5	18.6	18.9	19.3	
	6H	18.3	18.6	18.8	19.0	19.5	18.1	18.3	18.5	18.8	19.2	
	8H	18.3	18.5	18.8	19.0	19.4	18.1	18.3	18.5	18.7	19.2	
	12H	18.3	18.4	18.8	18.9	19.4	18.0	18.2	18.5	18.6	19.1	
12H	4H	18.4	18.7	18.8	19.1	19.5	18.1	18.4	18.6	18.8	19.2	
	6H	18.3	18.5	18.8	19.0	19.4	18.1	18.3	18.5	18.7	19.2	
	8H	18.3	18.4	18.8	18.9	19.4	18.0	18.2	18.5	18.6	19.1	



Variatie op waarnemingspositie voor lampafstanden 5

S = 1.0H	+3.3 / -13.0	+4.2 / -13.3
S = 1.5H	+6.0 / -13.9	+7.0 / -14.6
S = 2.0H	+8.0 / -14.2	+9.0 / -15.2

Standaardtabel BK000

Correctie-optabel 0.3 0.0

Geoormiddelde verblindingindicatie in relatie tot 2726lm Totale lichtstroom

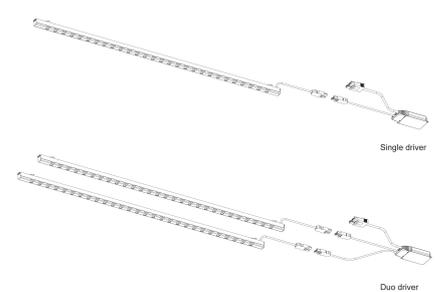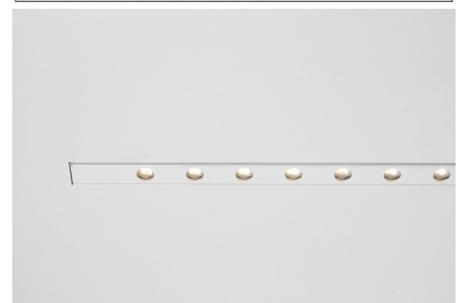



Sirio Easy-KlimaPlus, a 21.5 mm slim linear lighting fixture with lenses for use in Interalu Sirio Easy-KlimaPlus® ceilings.

- Fully integrated into [Interalu](#) Easy Klima Plus® ceilings
- Easy installation with magnetic mounting
- Available in three lengths 900, 1200 and 1500
- Unique lens configuration UGR < 19 office-compatible

Downloads

[Photometrics Sirio EKP](#)

NOTES

ADDITIONAL INFORMATION

Isolatieklasse	Class II
Driver positie	Loose driver
Producttoepassing	Education, Hospitality, Office, Public spaces
Kleurtemperatuur	Tunable White, 2700K
Productkleur	On request
Light control	1-10V dimming, Casambi dimming, DALI dimming
Emergency lighting	1 hour emergency power, Optional, Optional 1 hour autonomy self-test
Primaire aansluitingen	BST 14i2, Europlug, On request, GST18i3, GST18i5 pastelblauw, On the driver
Optics	Lens en louver
Air extraction	N/A
Family	Sirio
Voltage / frequency	220-240V, 50 / 60Hz
CIE Flux code	93 100 100 100 100
Powerfactor	>0.9
Kleurconsistentie (SDCM)	SDCM=3
IP-class	IP20 (upwards)/IP40 (downwards)
Material	Acrylic, Steel
Ambient temperature	-20°C / +40°C
Oriëntatie	Down
Packaging dimensions	Bulk packaging
Shape	Rectangular
Bevestiging	Recessed
Photobiological safety	IEC 62471: RG1 (low risc)
Specificaties	G7D1 / 06-02-2025

