



SIRIO-S BLACK

Sirio-S black is an elegant, slim LED pendant luminaire equipped with a row of mid-power LEDs, each with an individual lens and louver. The luminaire creates a low-glare light distribution (UGR < 19) suitable for use in office environments.

- Identical design to Sirio SAPP® ceiling luminaires
- Slim design available in three lengths: 880, 1200 and 1520 mm
- Low-glare light distribution (UGR < 19) suitable for use in office environments

Downloads




[Photometrics Sirio-S](#)

Create your own custom product, download the PDF specification sheet or add to quote:

Categories: [Pendant luminaires](#)



PRODUCT IMAGES

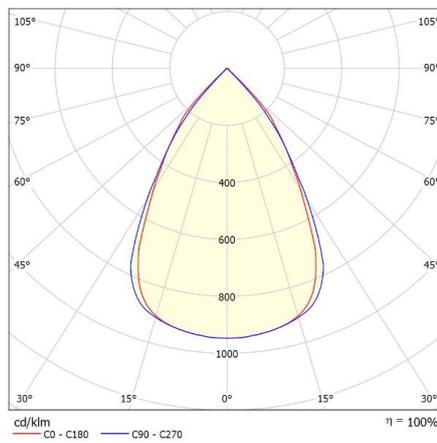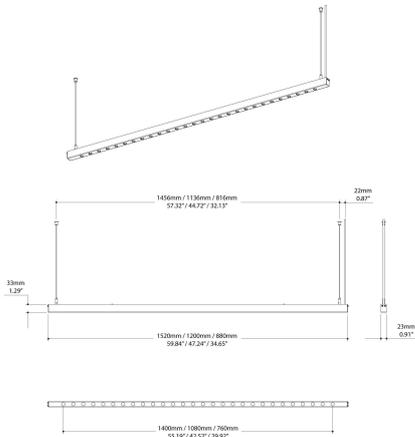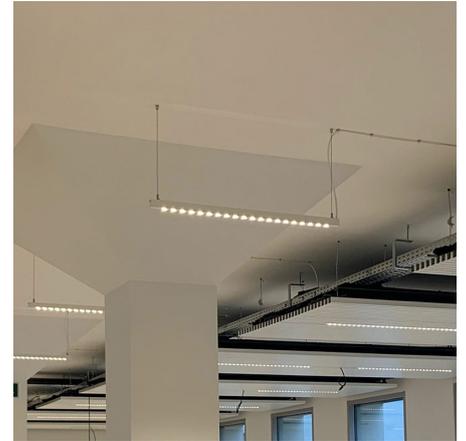

Glare Evaluation According to UGR

p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room Size	Viewing direction at right angles to lamp axis	Viewing direction parallel to lamp axis									
X	Y										
2H	2H	18.7	19.4	18.9	19.6	19.8	18.3	19.0	18.5	19.2	19.4
	3H	18.6	19.2	18.8	19.4	19.7	18.1	18.8	18.4	19.0	19.2
	4H	18.5	19.1	18.8	19.3	19.6	18.1	18.7	18.4	18.9	19.2
	6H	18.4	19.0	18.7	19.2	19.5	18.0	18.5	18.3	18.8	19.1
	12H	18.3	18.8	18.7	19.1	19.5	17.9	18.4	18.3	18.8	19.0
4H	2H	18.5	19.1	18.8	19.3	19.6	18.1	18.7	18.4	18.9	19.2
	3H	18.3	18.8	18.7	19.1	19.5	17.9	18.4	18.3	18.7	19.0
	4H	18.3	18.7	18.6	19.0	19.4	17.9	18.3	18.2	18.6	19.0
	6H	18.2	18.6	18.6	18.9	19.3	17.8	18.1	18.2	18.5	18.9
	12H	18.1	18.4	18.6	18.8	19.2	17.7	18.0	18.2	18.4	18.8
8H	4H	18.2	18.5	18.6	18.9	19.3	17.7	18.1	18.2	18.4	18.8
	6H	18.1	18.3	18.5	18.7	19.2	17.7	17.9	18.1	18.3	18.8
	8H	18.0	18.2	18.5	18.7	19.2	17.6	17.8	18.1	18.3	18.7
	12H	18.0	18.2	18.5	18.6	19.1	17.6	17.7	18.1	18.2	18.7
	12H	18.1	18.4	18.6	18.8	19.2	17.7	18.0	18.1	18.4	18.8
12H	4H	18.1	18.4	18.6	18.8	19.2	17.6	17.8	18.1	18.3	18.7
	6H	18.0	18.2	18.5	18.7	19.2	17.6	17.8	18.1	18.3	18.7
	8H	18.0	18.2	18.5	18.6	19.1	17.6	17.7	18.1	18.2	18.7

Correction Summand: BK00 = 0.0, BK00 = -0.4

Corrected glare indices referring to 3285lm Total Luminous Flux



Sirio-S black is an elegant, slim LED pendant luminaire equipped with a row of mid-power LEDs, each with an individual lens and louver. The luminaire creates a low-glare light distribution (UGR < 19) suitable for use in office environments.

- Identical design to Sirio SAPP® ceiling luminaires
- Slim design available in three lengths: 880, 1200 and 1520 mm
- Low-glare light distribution (UGR < 19) suitable for use in office environments

Downloads

[Photometrics Sirio-S](#)

Create your own custom product, download the PDF specification sheet or add to quote:

NOTES

ADDITIONAL INFORMATION

Driver positie	Loose driver
Producttoepassing	Education, Hospitality, Office, Public spaces
Kleurtemperatuur	Tunable White, 2700K
Light control	1-10V dimming, Casambi dimming, DALI dimming
Emergency lighting	1 hour emergency power, Optional, Optional 1 hour autonomy self-test
Primaire aansluitingen	On request, Kabel
Productkleur	On request
Optics	Lens en louver
Shape	Rectangular
Self-adhesive dust cover	Optional
Air extraction	N/A
Family	Sirio
Bevestiging	Pendant
Ambient temperature	-20°C / +40°C
Oriëntatie	Down
Material	Acrylic, Steel
IP-class	IP20 (upwards)/IP40 (downwards)
Packaging dimensions	Bulk packaging
CIE Flux code	93 100 100 100 100
Isolatieklasse	Class II
Kleurconsistentie (SDCM)	SDCM=3
Photobiological safety	IEC 62471: RG1 (low risc)
Specificaties	G7D1 / 06-02-2025

