



## **SIRIO-S WHITE**

Sirio-S white is an elegant slim LED pendant luminaire equipped with a row of mid-power LEDs, each with an individual lens and louver.

- Identical design to Sirio SAPP® ceiling luminaires
- Slim design available in three lengths: 880, 1200 and 1520 mm
- Light distribution with low glare (UGR<19) suitable for office environments

### **Downloads**




[Photometrics Sirio-S](#)

**Customize your product, download the PDF spec sheet or add to quote:**

**Categories:** [Pendant luminaires](#)



PRODUCT IMAGES

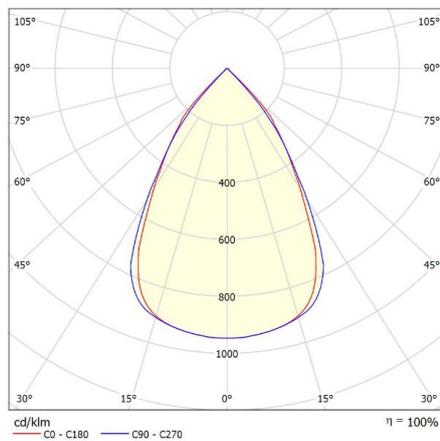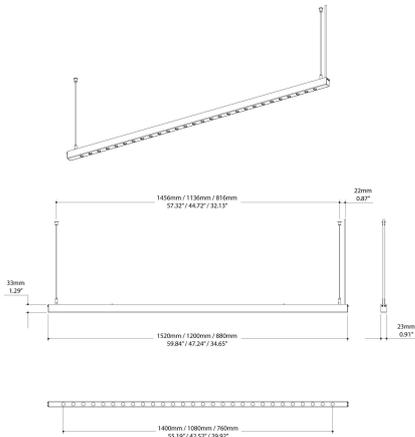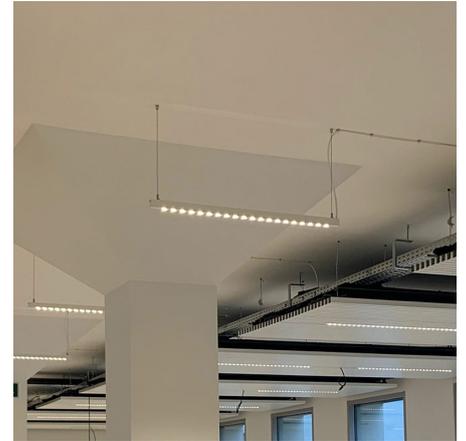

**Glare Evaluation According to UGR**

ρ Ceiling	70	70	50	50	30	70	70	50	50	30	
ρ Walls	50	30	50	30	30	50	30	50	30	30	
ρ Floor	20	20	20	20	20	20	20	20	20	20	
Room Size	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
X	Y										
2H	2H	18.7	19.4	18.9	19.6	19.8	18.3	19.0	18.5	19.2	19.4
3H	3H	18.6	19.2	18.8	19.4	19.7	18.1	18.8	18.4	19.0	19.2
4H	4H	18.5	19.1	18.8	19.3	19.6	18.1	18.7	18.4	18.9	19.2
6H	6H	18.4	19.0	18.7	19.2	19.5	18.0	18.5	18.3	18.8	19.1
8H	8H	18.4	18.9	18.7	19.2	19.5	18.0	18.5	18.3	18.8	19.1
12H	12H	18.3	18.8	18.7	19.1	19.5	17.9	18.4	18.3	18.7	19.0
2H	2H	18.5	19.1	18.8	19.3	19.6	18.1	18.7	18.4	18.9	19.2
3H	3H	18.3	18.8	18.7	19.1	19.5	17.9	18.4	18.3	18.7	19.0
4H	4H	18.3	18.7	18.6	19.0	19.4	17.9	18.3	18.2	18.6	19.0
6H	6H	18.2	18.6	18.6	18.9	19.3	17.8	18.1	18.2	18.5	18.9
8H	8H	18.2	18.5	18.6	18.9	19.3	17.8	18.1	18.2	18.5	18.9
12H	12H	18.1	18.4	18.6	18.8	19.2	17.7	18.0	18.2	18.4	18.8
2H	4H	18.2	18.5	18.6	18.9	19.3	17.7	18.1	18.2	18.4	18.8
6H	6H	18.1	18.3	18.5	18.7	19.2	17.7	17.9	18.1	18.3	18.8
8H	8H	18.0	18.2	18.5	18.7	19.2	17.6	17.8	18.1	18.3	18.7
12H	12H	18.0	18.2	18.5	18.6	19.1	17.6	17.7	18.1	18.2	18.7
4H	4H	18.1	18.4	18.6	18.8	19.2	17.7	18.0	18.1	18.4	18.8
6H	6H	18.0	18.2	18.5	18.7	19.2	17.6	17.8	18.1	18.3	18.7
8H	8H	18.0	18.2	18.5	18.6	19.1	17.6	17.7	18.1	18.2	18.7

Correction Summand: 0.0

Standard table: BK00

Corrected glare indices referring to 3285lm Total Luminous Flux



Sirio-S white is an elegant slim LED pendant luminaire equipped with a row of mid-power LEDs, each with an individual lens and louver.

- Identical design to Sirio SAPP® ceiling luminaires
- Slim design available in three lengths: 880, 1200 and 1520 mm
- Light distribution with low glare (UGR<19) suitable for office environments

Downloads

[Photometrics Sirio-S](#)

**Customize your product, download the PDF spec sheet or add to quote:**

## NOTES

---

---

---

---

---

---

---

## ADDITIONAL INFORMATION

<b>Driver positie</b>	Loose driver
<b>Producttoepassing</b>	Education, Hospitality, Office, Public spaces
<b>Light control</b>	1-10V dimming, Casambi dimming, DALI dimming
<b>Emergency lighting</b>	1 hour emergency power, Optional, Optional 1 hour autonomy self-test
<b>Primaire aansluitingen</b>	GST18i5 pastelblauw, Kabel
<b>Optics</b>	Lens en louver
<b>Shape</b>	Rectangular
<b>Air extraction</b>	N/A
<b>Voltage / frequency</b>	220-240V, 50 / 60Hz
<b>Family</b>	Sirio
<b>Bevestiging</b>	Pendant
<b>Powerfactor</b>	>0.9
<b>Ambient temperature</b>	-20°C / +40°C
<b>Oriëntatie</b>	Down
<b>Material</b>	Acrylic, Steel
<b>IP-class</b>	IP20 (upwards)/IP40 (downwards)
<b>Packaging dimensions</b>	Bulk packaging
<b>CIE Flux code</b>	93 100 100 100 100
<b>Isolatieklasse</b>	Class II
<b>Kleurconsistentie (SDCM)</b>	SDCM=3
<b>Photobiological safety</b>	IEC 62471: RG1 (low risc)
<b>Specificaties</b>	G7D1 / 06-02-2025

