



## **SIRIO SAPP 1500**

A linear lighting fixture with lenses for use in Interalu SAPP® ceilings.

- Sirio SAPP 1500 can be placed between structures, creating an integrated system with the ceiling without disrupting the architectural appearance.
- Provides highly controlled light distribution, excellent uniformity and UGR<19
- The fixture complies with NEN-EN 12464-1

### **Downloads**



[Photometrics Sirio SAPP](#)

**Create your own product, download the PDF specification sheet or add to the quotation:**

**Categories:** [Climate ceiling fixtures](#), [Baffle luminaires](#)



PRODUCT IMAGES

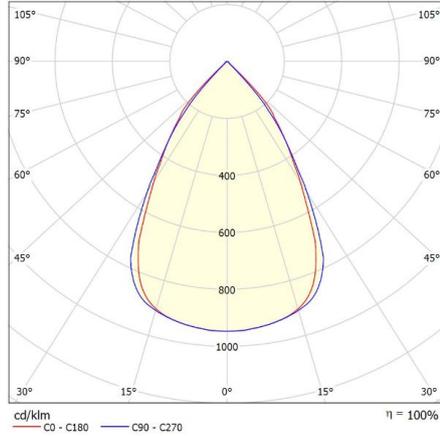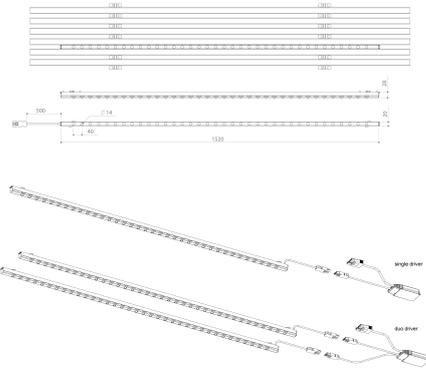

**Glare Evaluation According to UGR**

p. Ceiling		70	70	50	50	30	30	70	70	50	50	30	
p. Walls		50	30	50	30	30	50	50	30	30	50	30	
p. Floor		20	20	20	20	20	20	20	20	20	20	20	
Room Size	Viewing direction at right angles to lamp axis	Viewing direction parallel to lamp axis											
X	Y												
2H	2H	18.7	19.4	18.9	19.6	19.8	18.3	19.0	18.5	19.2	19.4	19.4	
	3H	18.6	19.2	18.8	19.4	19.7	18.1	18.8	18.4	19.0	19.2	19.2	
	4H	18.5	19.1	18.8	19.3	19.6	18.1	18.7	18.4	18.9	19.2	19.2	
	6H	18.4	19.0	18.7	19.2	19.5	18.0	18.5	18.3	18.6	19.1	19.1	
	12H	18.3	18.8	18.7	19.1	19.5	17.9	18.4	18.3	18.7	19.0	19.0	
4H	2H	18.5	19.1	18.8	19.3	19.6	18.1	18.7	18.4	18.9	19.2	19.2	
	3H	18.3	18.8	18.7	19.1	19.5	17.9	18.4	18.3	18.7	19.0	19.0	
	4H	18.3	18.7	18.6	19.0	19.4	17.9	18.3	18.2	18.6	19.0	19.0	
	6H	18.2	18.6	18.6	18.9	19.3	17.8	18.1	18.2	18.5	18.9	18.9	
	12H	18.2	18.5	18.6	18.9	19.3	17.8	18.1	18.2	18.5	18.9	18.9	
8H	4H	18.2	18.5	18.6	18.9	19.3	17.7	18.1	18.2	18.4	18.8	18.8	
	6H	18.1	18.3	18.5	18.7	19.2	17.7	17.9	18.1	18.3	18.8	18.8	
	8H	18.0	18.2	18.5	18.7	19.2	17.6	17.8	18.1	18.3	18.7	18.7	
	12H	18.0	18.2	18.5	18.6	19.1	17.6	17.7	18.1	18.2	18.7	18.7	
	12H	18.1	18.4	18.6	18.8	19.2	17.7	18.0	18.1	18.4	18.8	18.8	
12H	6H	18.0	18.2	18.5	18.7	19.2	17.6	17.8	18.1	18.3	18.7	18.7	
	8H	18.0	18.2	18.5	18.6	19.1	17.6	17.7	18.1	18.2	18.7	18.7	
	8H	18.0	18.2	18.5	18.6	19.1	17.6	17.7	18.1	18.2	18.7	18.7	



Variation of the observer position for the luminaire distances S:

S = 1.0H	+3.8 / -12.2	+4.7 / -13.4
S = 1.5H	+6.5 / -14.3	+7.5 / -14.8
S = 2.0H	+8.5 / -15.6	+9.5 / -15.5

Standard table Correction Summand

BK00	BK00
0.0	-0.4

Corrected Glare Indices referring to 3283lm Total Luminous Flux

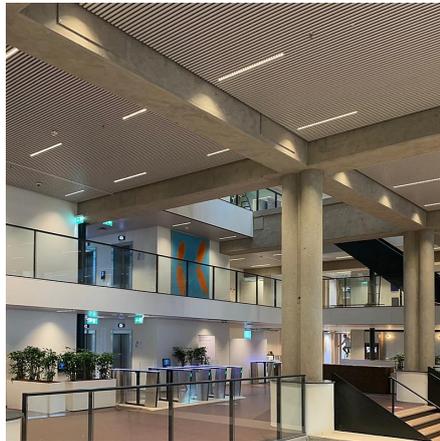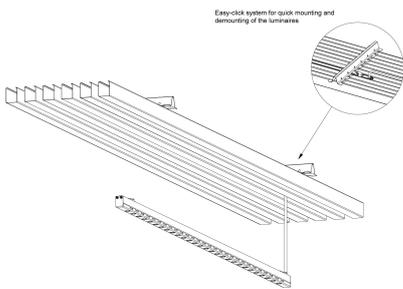



A linear lighting fixture with lenses for use in Interalu SAPP® ceilings.

- Sirio SAPP 1500 can be placed between structures, creating an integrated system with the ceiling without disrupting the architectural appearance.
- Provides highly controlled light distribution, excellent uniformity and UGR<19
- The fixture complies with NEN-EN 12464-1

#### Downloads

[Photometrics Sirio SAPP](#)

**Create your own product, download the PDF specification sheet or add to the quotation:**

## NOTES

---

---

---

---

---

---

---

## ADDITIONAL INFORMATION

<b>Driver positie</b>	Loose driver
<b>Producttoepassing</b>	Education, Hospitality, Office, Public spaces
<b>Shape</b>	Rectangular
<b>Kleurtemperatuur</b>	Tunable White, 2700K
<b>Light control</b>	1-10V dimming, Casambi dimming, DALI dimming
<b>Emergency lighting</b>	1 hour emergency power, Optional, Optional 1 hour autonomy self-test
<b>Primaire aansluitingen</b>	BST 14i2, Europlug, On request, GST18i3, GST18i5 pastelblauw, On the driver
<b>Productkleur</b>	On request
<b>Optics</b>	Lens en louver
<b>Self-adhesive dust cover</b>	Optional
<b>Air extraction</b>	N/A
<b>Family</b>	Sirio
<b>Bevestiging</b>	Recessed
<b>Ambient temperature</b>	-20°C / +40°C
<b>Oriëntatie</b>	Down
<b>Material</b>	Acrylic, Steel
<b>IP-class</b>	IP20 (upwards)/IP40 (downwards)
<b>Packaging dimensions</b>	Bulk packaging
<b>CIE Flux code</b>	94 100 100 100 100
<b>Isolatieklasse</b>	Class II
<b>Kleurconsistentie (SDCM)</b>	SDCM=3
<b>Photobiological safety</b>	IEC 62471: RG1 (low risc)
<b>Specificaties</b>	G7D1 / 06-02-2025

