



STRATOS-K 100

Stratos-K 100 is a linear LED luminaire designed for use in climate ceilings with visible grid systems. The luminaire is shielded by a microprismatic lens (with a UGR<19 for office applications according to NEN-EN 12.464/1).

- Powder-coated aluminum construction
- Equipped with a prismatic lens (UGR<19)
- Tunable white or melanopic lighting versions available
- C-hook mounting enables easy installation
- Suitable for use in offices, schools, care centers and other public facilities.






Downloads

[Photometrics Stratos-K 100](#)

Create your own product, download the PDF specification sheet or add to the quotation:

Categories: [Climate ceiling fixtures](#)



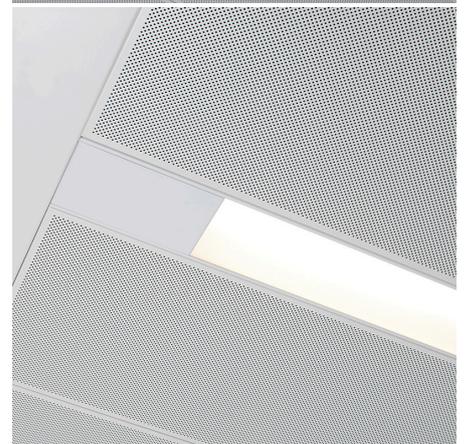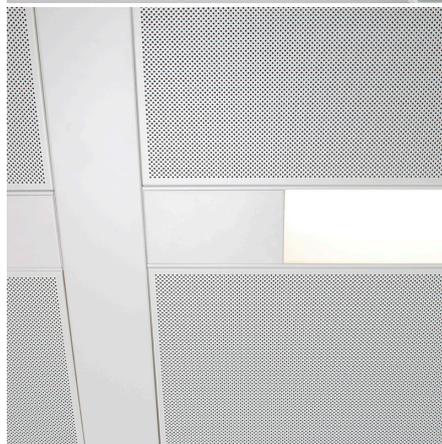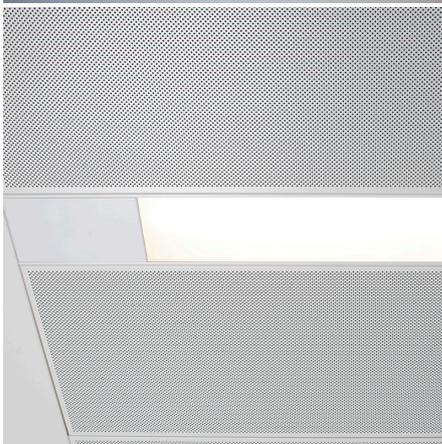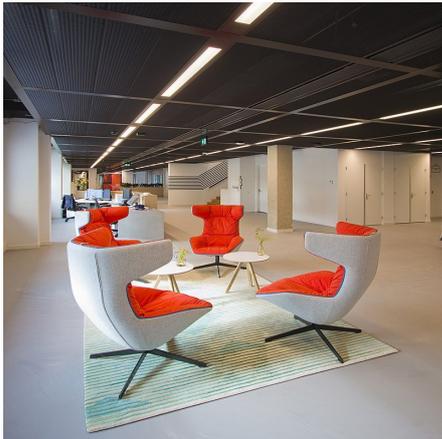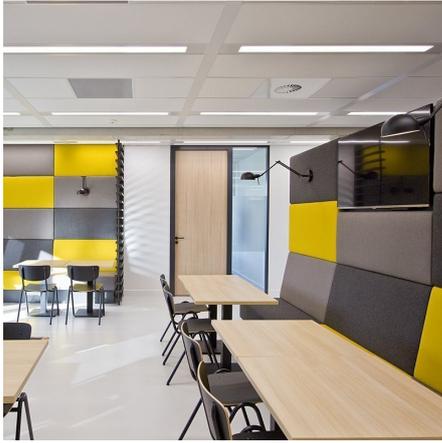

Stratos-K 100 is a linear LED luminaire designed for use in climate ceilings with visible grid systems. The luminaire is shielded by a microprismatic lens (with a UGR<19 for office applications according to NEN-EN 12.464/1).

- Powder-coated aluminum construction
- Equipped with a prismatic lens (UGR<19)
- Tunable white or melanic lighting versions available
- C-hook mounting enables easy installation
- Suitable for use in offices, schools, care centers and other public facilities.

Downloads

[Photometrics Stratos-K 100](#)

Create your own product, download the PDF specification sheet or add to the quotation:

NOTES

ADDITIONAL INFORMATION

Driver positie	Attached to the fixture, Loose driver
Breedte	92mm
Energielabel	A++
Kleurtemperatuur	Tunable White, 2700K
Length	1720mm
Primaire aansluitingen	BST 14i2, Europlug, On request, GST18i3, GST18i5 pastelblauw, On the driver
Light control	1-10V dimming, Casambi dimming, DALI dimming
Emergency lighting	1 hour emergency power, Optional, Optional 1 hour autonomy self-test
Producttoepassing	Education, Hospitality, Office, Public spaces
Isolatieklasse	Class II
Air extraction	Optional
Family	Stratos
Voltage / frequency	220-240V, 50 / 60Hz
Material	Acrylic, Aluminium
Powerfactor	>0.9
Kleurconsistentie (SDCM)	SDCM=3
IP-class	IP20 (upwards)/IP40 (downwards)
Ambient temperature	-20°C / +40°C
Optics	Microprismatic lens, Opalen diffusor
Oriëntatie	Down
Shape	Rectangular
Bevestiging	Recessed
Packaging dimensions	Bulk packaging
Photobiological safety	IEC 62471: RG1 (low risc)

