

STRATOS-Y 70

Stratos-Y 70 is a linear fixture for use in panel and climate ceilings, with a prismatic lens or opal diffuser.

- Lightweight construction
- Simple installation in a pre-fabricated ceiling opening
- Available in various lengths
- With microprismatic lens (UGR ≤ 19 for office applications) or opal diffuser

Downloads



[Photometrics Stratos-70](#)

Create your own product, download the PDF specification sheet or add to the quotation:


Categories: [Climate ceiling fixtures](#)



PRODUCT IMAGES

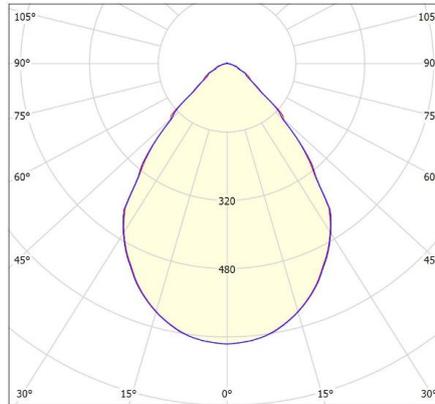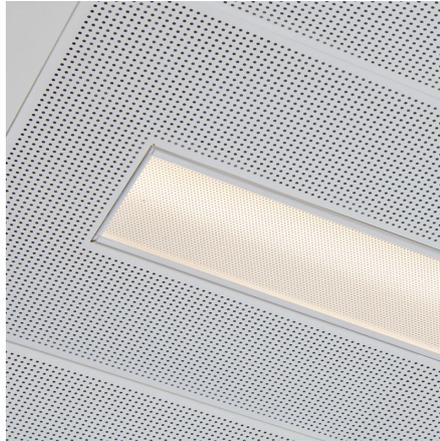

cd/klm
C0 - C180 — C90 - C270
η = 100%

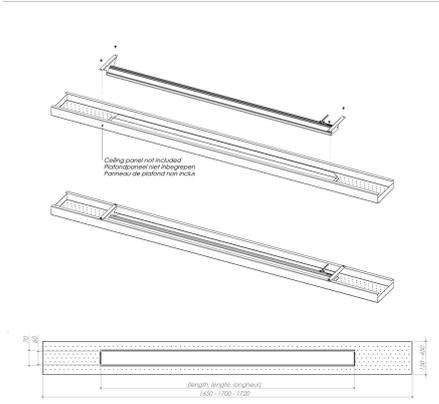

f-waardering volgens UGR

p Plafond	70	70	50	50	30	70	70	50	50	30	
p Muren	50	30	50	30	30	50	30	50	30	30	
p Vloer	20	20	20	20	20	20	20	20	20	20	
Ruimteafmeting	Perspectief dwars					Perspectief langs					
X	c.o.v. lampen					c.o.v. lampen					
Y											
2H	2H	17.4	18.4	17.7	18.6	18.8	17.4	18.3	17.7	18.6	18.8
	3H	17.8	18.6	18.1	18.9	19.1	17.7	18.6	18.0	18.8	19.1
	4H	17.9	18.7	18.3	19.0	19.3	17.9	18.7	18.3	19.0	19.3
	6H	18.1	18.8	18.4	19.1	19.4	18.0	18.8	18.4	19.1	19.4
	8H	18.1	18.8	18.4	19.1	19.4	18.1	18.7	18.4	19.1	19.4
	12H	18.1	18.8	18.5	19.1	19.4	18.1	18.7	18.4	19.1	19.4
4H	2H	17.5	18.3	17.8	18.5	18.8	17.4	18.2	17.8	18.5	18.8
	3H	17.9	18.6	18.3	18.9	19.3	17.9	18.6	18.3	18.9	19.2
	4H	18.2	18.8	18.6	19.2	19.5	18.2	18.8	18.6	19.1	19.5
	6H	18.4	18.9	18.8	19.3	19.7	18.4	18.9	18.8	19.3	19.7
	8H	18.5	18.9	18.9	19.3	19.7	18.5	18.9	18.9	19.3	19.7
	12H	18.5	18.9	19.0	19.4	19.8	18.5	18.9	19.0	19.3	19.8
8H	4H	18.3	18.7	18.7	19.1	19.5	18.3	18.7	18.7	19.1	19.5
	6H	18.5	18.9	19.0	19.3	19.8	18.5	18.9	19.0	19.3	19.8
	8H	18.6	18.9	19.1	19.4	19.9	18.6	18.9	19.1	19.3	19.8
	12H	18.7	19.0	19.2	19.4	20.0	18.7	18.9	19.2	19.4	19.9
12H	4H	18.3	18.7	18.7	19.1	19.5	18.3	18.7	18.7	19.1	19.5
	6H	18.5	18.8	19.0	19.3	19.8	18.5	18.8	19.0	19.3	19.8
	8H	18.6	18.9	19.1	19.3	19.9	18.6	18.8	19.1	19.3	19.9

Variable op assemerpositie voor lampkandelen S

S = 1.0H	+1.2	-1.7	+1.1	-1.6
S = 1.5H	+2.3	-2.1	+2.4	-1.9
S = 2.0H	+3.8	-2.8	+3.9	-2.9

Standaardtabel BK02 BK02
Correctie-optelbaar 0.6 0.6

Geenrisicovolle verblindingindicatie in relatie tot 3793lm Totale lichtstroom

Stratos-Y 70 is a linear fixture for use in panel and climate ceilings, with a prismatic lens or opal diffuser.

- Lightweight construction
- Simple installation in a pre-fabricated ceiling opening
- Available in various lengths
- With microprismatic lens (UGR ≤19 for office applications) or opal diffuser

Downloads

[Photometrics Stratos-70](#)

Create your own product, download the PDF specification sheet or add to the quotation:

NOTES

ADDITIONAL INFORMATION

Isolatieklasse	Class II
Driver positie	Attached to the fixture, Loose driver
Producttoepassing	Education, Hospitality, Office, Public spaces
Kleurtemperatuur	Tunable White, 2700K
Primaire aansluitingen	BST 14i2, Europlug, On request, GST18i3, GST18i5 pastelblauw, On the driver
Productkleur	On request
Light control	1-10V dimming, Casambi dimming, DALI dimming
Emergency lighting	1 hour emergency power, Optional, Optional 1 hour autonomy self-test
Self-adhesive dust cover	Optional
Air extraction	Optional
Family	Stratos
Armatuurefficiëntie	>140lm/W
Kleurconsistentie (SDCM)	SDCM=3
IP-class	IP20 (upwards)/IP40 (downwards)
Material	Acrylic, Aluminium
Optics	Microprismatic lens, Opalen diffusor
Ambient temperature	-20°C / +40°C
Shape	Rectangular
Packaging dimensions	Bulk packaging
Breedte	70mm
Bevestiging	Recessed
Oriëntatie	Down
C-Haak hoogte	N/A
Photobiological safety	IEC 62471: RG1 (low risc)

