



## VECTURA SAPP PRISMATIC

Vectura SAPP prismatic is a luminaire for integration into the [Interalu SAPP® climate ceiling](#). The design of this luminaire makes it easy to integrate without modifications to the ceiling or its structure.

- Profile size corresponds to the SAPP® ceiling structure
- Full integration with an architectural appearance
- Length 1000 mm, 1500 mm, 2000 mm, 2500 mm, 3000 mm, 3500 mm, 4000 mm and 4500 mm standard
- Microprismatic glare protection (UGR < 19) versions available





### Downloads

[Photometrics Vectura SAPP Prismatic](#)

**Categories:** [Climate ceiling fixtures](#), [Baffle luminaires](#)



PRODUCT IMAGES

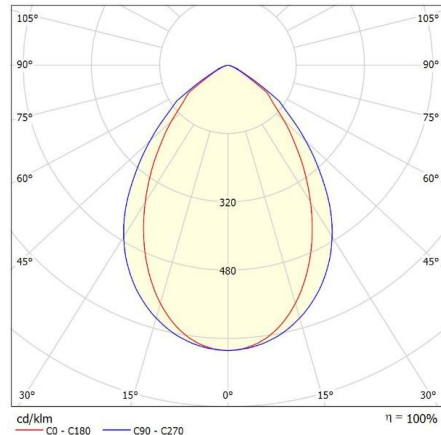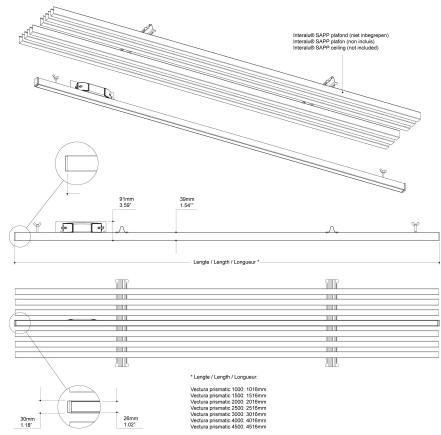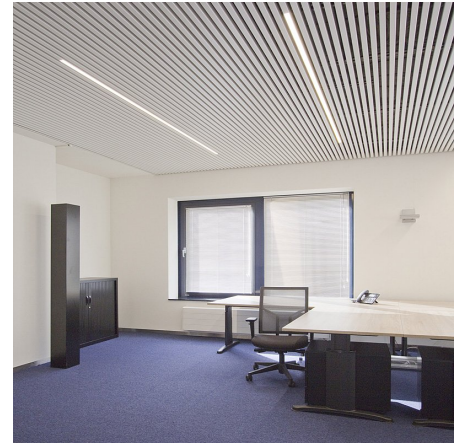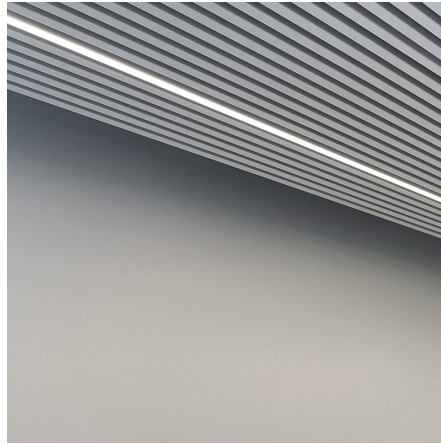

**f-waardering volgens UGR**

p Plafond	70				50				30				
	70	30	50	30	70	30	50	30	70	30	50	30	
p Muren													
p Voer													
Ruimteafmeting X	Y	Perspectief dwars						Perspectief langs					
		t.o.v. lampenrij						t.o.v. lampenrij					
2H	2H	17.5	18.5	17.8	18.7	18.9	19.0	20.0	19.3	20.2	20.4		
	3H	17.5	18.4	17.8	18.7	18.9	19.1	20.0	19.4	20.2	20.4		
	4H	17.5	18.3	17.8	18.6	18.9	19.1	19.9	19.4	20.1	20.4		
	6H	17.5	18.2	17.8	18.5	18.8	19.0	19.8	19.3	20.0	20.3		
4H	2H	17.4	18.1	17.8	18.4	18.8	19.0	19.7	19.3	20.0	20.3		
	3H	17.4	18.1	17.8	18.4	18.7	18.9	19.6	19.3	19.9	20.2		
	4H	17.6	18.4	17.9	18.7	18.9	19.0	19.8	19.3	20.1	20.3		
	6H	17.7	18.3	18.0	18.7	19.0	19.1	19.8	19.4	20.1	20.4		
8H	2H	17.6	18.1	18.0	18.6	18.9	19.1	19.7	19.4	20.0	20.3		
	3H	17.6	18.0	18.0	18.5	18.9	19.0	19.5	19.4	19.9	20.3		
	4H	17.6	18.0	18.0	18.4	18.8	19.0	19.5	19.4	19.8	20.2		
	6H	17.6	18.0	18.0	18.4	18.8	19.0	19.4	19.4	19.8	20.2		
12H	2H	17.5	17.8	18.0	18.3	18.8	18.9	19.2	19.4	19.7	20.1		
	3H	17.5	17.8	18.0	18.3	18.7	18.9	19.2	19.4	19.6	20.1		
	4H	17.6	18.0	18.0	18.4	18.8	18.9	19.4	19.4	19.8	20.2		
	6H	17.5	17.8	18.0	18.3	18.7	18.9	19.2	19.4	19.7	20.1		


Variatie op waarnemerspositie voor lampenstanden 5


S = 1.0H	+0.8 / -1.1	+0.4 / -1.0
S = 1.5H	+1.7 / -4.5	+2.1 / -4.6
S = 2.0H	+3.1 / -6.5	+3.8 / -6.6

Standardeenheden BK01 BK01

Correctie-optimal -0.3 1.2

Geconcentreerde verblindingindicatie in relatie tot 2482lm Totale lichtstroom

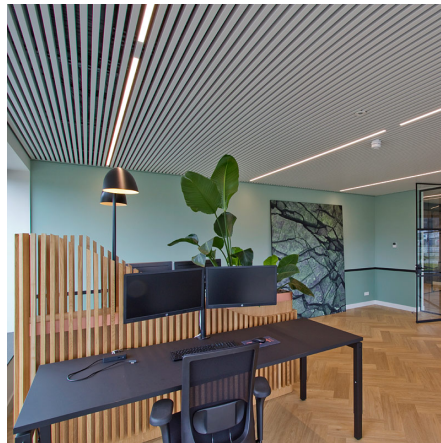

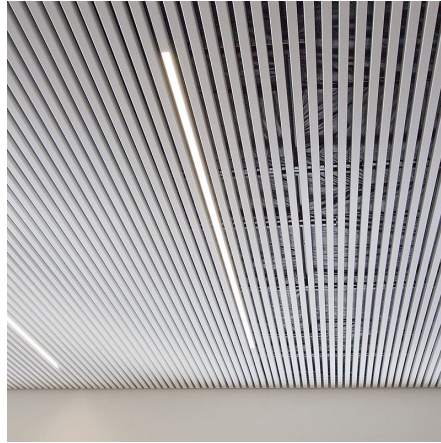

Vectura SAPP prismatic is a luminaire for integration into the [Interalu SAPP® climate ceiling](#). The design of this luminaire makes it easy to integrate without modifications to the ceiling or its structure.

- Profile size corresponds to the SAPP® ceiling structure
- Full integration with an architectural appearance
- Length 1000 mm, 1500 mm, 2000 mm, 2500 mm, 3000 mm, 3500 mm, 4000 mm and 4500 mm standard
- Microprismatic glare protection (UGR< 19) versions available

## Downloads

[Photometrics Vectura SAPP Prismatic](#)

## NOTES

---

---

---

---

---

---

---

## ADDITIONAL INFORMATION

<b>Family</b>	Vectura
<b>Primaire aansluitingen</b>	BST 14i2, Europlug, On request, GST18i3, GST18i5 pastelblauw, On the driver
<b>Voltage / frequency</b>	220-240V, 50 / 60Hz
<b>Producttoepassing</b>	Hospitality, Office, Public spaces
<b>Powerfactor</b>	>0.9
<b>Emergency lighting</b>	1 hour emergency power, Optional, Optional 1 hour autonomy self-test
<b>Driver positie</b>	Loose driver
<b>Kleurtemperatuur</b>	Tunable White, 2700K

