



MESON ROUND 190

Meson round 190 Refit is a range of efficient LED downlights featuring a powerful LED, shielded by either a prismatic lens or a diffuser. The shielding is recessed behind a matte or high-gloss reflector.

- Easy installation with spring clips
- Trim ring in white, black, or silver
- Reflector ring available in matte anodized, glossy anodized, matte black, or matte white
- Opal diffuser or prismatic lens
- Tunable white versions available



Downloads

[Photometrics Meson round 190 Refit](#)

Categories: [Downlights and recessed spotlights](#)



PRODUCT IMAGES

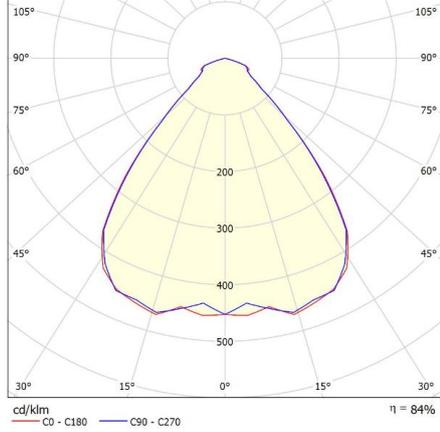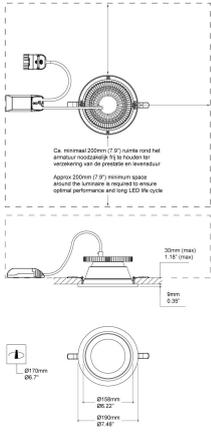

f-waardering volgens UGR

p Plafond	70	70	50	50	30	70	70	50	50	30	
	50	30	50	30	20	30	50	30	50	30	
p Muren											
p Vloer											
Ruimteafmeting	Perspectief dwars					Perspectief langs					
X	t.v.v. lampen					t.v.v. lampen					
Y											
2H	2H	17.9	18.8	18.1	19.0	19.2	17.8	18.8	18.1	19.0	19.2
	3H	18.3	19.2	18.6	19.5	19.7	18.3	19.1	18.6	19.4	19.6
	4H	18.4	19.2	18.7	19.4	19.7	18.3	19.1	18.6	19.4	19.6
	6H	18.3	19.1	18.6	19.3	19.6	18.2	19.0	18.6	19.3	19.6
	8H	18.3	19.0	18.6	19.3	19.6	18.2	18.9	18.6	19.2	19.5
	12H	18.2	18.9	18.6	19.2	19.5	18.2	18.8	18.5	19.2	19.5
4H	2H	18.0	18.8	18.3	19.0	19.3	17.9	18.7	18.2	19.0	19.3
	3H	18.6	19.3	18.9	19.6	19.9	18.5	19.2	18.9	19.5	19.8
	4H	18.6	19.2	19.0	19.6	19.9	18.6	19.2	19.0	19.5	19.9
	6H	18.6	19.1	19.0	19.4	19.8	18.5	19.0	18.9	19.4	19.8
	8H	18.5	19.0	19.0	19.4	19.8	18.5	18.9	18.9	19.3	19.7
	12H	18.5	18.9	18.9	19.3	19.7	18.5	18.9	18.9	19.3	19.7
8H	4H	18.6	19.1	19.0	19.4	19.8	18.5	19.0	19.0	19.4	19.8
	6H	18.5	18.9	19.0	19.3	19.8	18.5	18.8	18.9	19.3	19.7
	8H	18.5	18.8	19.0	19.3	19.7	18.4	18.8	18.9	19.2	19.7
	12H	18.5	18.7	18.9	19.2	19.7	18.4	18.7	18.9	19.1	19.6
12H	4H	18.6	19.0	19.0	19.4	19.8	18.5	18.9	18.9	19.3	19.7
	6H	18.5	18.8	19.0	19.2	19.7	18.4	18.8	18.9	19.2	19.7
	8H	18.5	18.7	18.9	19.2	19.7	18.4	18.7	18.9	19.1	19.6

Variatie op waarnemerspositie voor lampstanden S

S = 1.0H	+1.7 / -2.5	+1.8 / -2.5
S = 1.5H	+3.7 / -3.2	+3.7 / -3.2
S = 2.0H	+5.5 / -3.0	+5.5 / -3.2

Standtafel: BK01 BK01

Correctie-optebel: -0.3 -0.3

Gecorrigeerde verblindingindicatie in relatie tot 2492lm Totale lichtroom





Meson round 190 Refit is a range of efficient LED downlights featuring a powerful LED, shielded by either a prismatic lens or a diffuser. The shielding is recessed behind a matte or high-gloss reflector.

- Easy installation with spring clips
- Trim ring in white, black, or silver
- Reflector ring available in matte anodized, glossy anodized, matte black, or matte white
- Opal diffuser or prismatic lens
- Tunable white versions available

Downloads

[Photometrics Meson round 190 Refit](#)

NOTES

ADDITIONAL INFORMATION

Isolatieklasse	Class-I
Driver positie	Loose driver
Light control	1-10V dimming, Casambi dimming, DALI dimming
Producttoepassing	Education, Hospitality, Office, Public spaces
Optics	Microprismatic lens, Opalen diffusor
Oriëntatie	Down
Kleurtemperatuur	Tunable White, 2700K
Ambient temperature	-20°C / +40°C
Primaire aansluitingen	BST 14i2, Europlug, On request, GST18i3, GST18i5 pastelblauw, On the driver
Shape	Round
Productkleur	On request
Bevestiging	Recessed
Photobiological safety	IEC 62471: RG1 (low risc)
Emergency lighting	1 hour emergency power, Optional, Optional 1 hour autonomy self-test
Family	Meson
Energielabel	A++
Kleurconsistentie (SDCM)	SDCM=2
Voltage / frequency	220-240V, 50 / 60Hz
Material	Acrylic, Steel
Powerfactor	>0.9

